



BRUSTIA




ALFA MECCANICA



Technology
for the Footwear
Industry

Backpart Moulding machine with Hot - Cold stations 684 series

Alfa 684 CF2HP

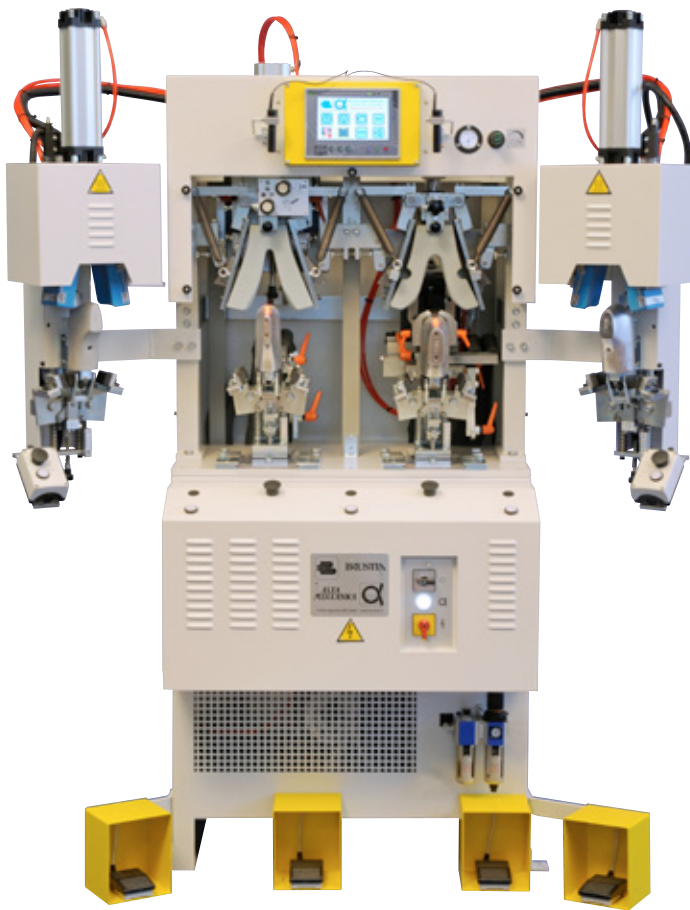

Hot and cold counter moulding machine.

The upgrade of the ALFA 684 HOT/COLD counter moulding machine for thermoplastic and thermomboard counter has been developed considering the most recent request of our customers that is the handy use and containment of work space.

The new series ALFA 684 has small dimensions with a new frame design with more linear and rational surface and a new powerful Hardware-Software that gives the operator the possibility to control all machine functions by a single terminal. Infact the operator can introduce any kind of set values of machine cycle, hot and cold mould temperatures and also receive warnings in case of malfunctions.

Main data:

- Complete adjustment for outer and inner moulds, flanging wipers and pincers gives the possibility to work from baby size to men size included snow board boots
- Optical projector or pneumatic positioning upper device for models with wipers
- The operating cycle is marked by the column moving up to the rubber cushion that closing makes wiper movement

Available models and optionals

Following is the list of our most spread and known hot and hot/cold models. Because the modularity of this series, we remind that it is possible having other required solution machines. Please contact us.

ALFA 684F: Two stations equipped with heated moulds and plates for folding over seat edges

ALFA 684C: Two stations equipped with chilled moulds

ALFA 684CF: Two stations equipped with chilled moulds and plates for folding over seat edges

ALFA 684C2HP: Two stations equipped with chilled moulds plus two pre-heated stations with upper pulling grippers

ALFA 684CF2HP: Two stations equipped with chilled moulds and plates for folding over seat edges plus two pre-heated stations with upper pulling grippers

OPT/M: Moulds, cushions, wipers and pincers positioned for Mocasino working

OPT/GY: Arranged machine for Good Year work

OPT/PR: Adjustable width of pincers

OPT/P: Programmable pulling pincers

OPT/FT: Safety photoelectric barrier system

OPT/HP: Independent pre-heated station with upper pulling grippers



Features and technical specifications

Dimensions	156 x 85 x 200 (h) cm
Net weight	571 Kg
Compressed air consumption lt/cy at 6 bar	87
Electrical consumption	2700 W
Daily output pairs	1100